

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 323 667 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.07.2003 Bulletin 2003/27

(51) Int Cl.7: B67C 3/26, B67C 3/22,
B67C 3/10

(21) Application number: 01830805.6

(22) Date of filing: 24.12.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

• Abati, Stefano,
c/o Sig Simonazzi Beverage S.p.A
43040 Parma (IT)

(71) Applicant: SIG SIMONAZZI S.P.A.
43040 Parma (IT)

(74) Representative: Long, Giorgio et al
Jacobacci & Partners S.p.A.
Via Senato, 8
20121 Milano (IT)

(72) Inventors:
• Vescovi, Marco,
c/o Sig Simonazzi Beverage S.p.A
43040 Parma (IT)

(54) Valve unit for filling machines

(57) The present invention relates to a valve unit for container filling machines, and particularly for bottle fillers.

More particularly, the present invention relates to a valve unit (1), particularly for machines for filling containers (7), comprising a hollow body (2) in which a plug (3) is slidably housed, a passage (8) for a fluid (6) for filling the said container (7) being formed in the said hollow body (2), characterized in that the said valve unit comprises means of directing a secondary fluid towards and/or from the container (7), these means being separated from the said passage (8) for the filling fluid (6).

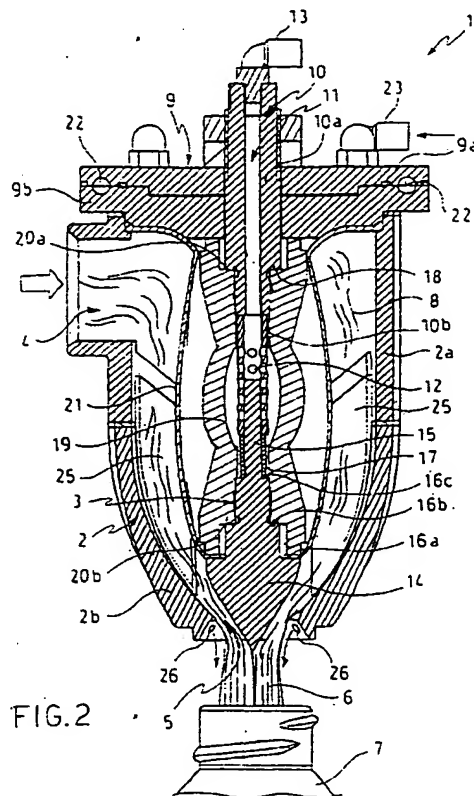


FIG.2

EP 1 323 667 A1

Description

[0001] The present invention relates to a valve unit for container filling machines, and particularly for bottle fillers.

[0002] In the field of equipment for bottling beverages, it is known that it is essential to ensure the greatest possible sterility in all parts of the machine which come into contact with the beverage, and to prevent the flow of the beverage from corresponding reservoirs from coming into contact with external contaminants in the course of its flow into the container. For example, the supply nozzle can be subject to a risk of contamination, both due to the fact that it has a supply aperture - and therefore exposure to the external air - and because its very structure comprises moving mechanisms and parts which are difficult to clean. To overcome this problem, supply nozzles have been designed with a physical barrier (in practice a seal) between the beverage flow channel and the valve plug. These devices ensure that an adequate degree of sterility is maintained along the whole of the beverage flow path within the filling machine.

[0003] However, the beverage also flows along a path which, though short, is totally exposed to the external environment, between the supply aperture of the nozzle - which is normally not inserted into the neck of the container, but positioned above it - and the container itself. It is possible, therefore, that the beverage may be contaminated by external agents during this flow, thus negating the measures taken in the upstream equipment to maintain an aseptic environment.

[0004] The problem tackled by the present invention is therefore that of providing a method for the aseptic filling of containers, and a valve unit for filling machines which is specifically designed for the application of this method, in order to overcome these drawbacks.

[0005] This problem is resolved by a method for the aseptic filling of containers and by a corresponding valve unit as specified in the attached claims.

[0006] Further characteristics and advantages of the valve unit for filling machines according to the present invention are made clearer by the following description of a preferred embodiment, provided below for guidance and without restrictive intent, with reference to the following figures, in which:

Figure 1 shows a perspective view in longitudinal section of the valve unit according to the invention; Figure 2 shows a side view in longitudinal section of the valve unit of Figure 1, in the operating condition.

[0007] With reference to the figure, the valve unit for filling machines according to the invention, indicated as a whole by the number 1, comprises a hollow body 2 in which a plug 3 is slidably housed.

[0008] The hollow body 2 comprises an inlet aperture 4 and an outlet aperture 5 for the fluid 6 for filling the

container 7. The said inlet aperture 4 is located in the upper portion of the lateral surface of the hollow body 2, while the outlet aperture 5 is formed on the lower surface of the hollow body 2, in alignment with the plug 3. Thus a passage 8 for the filling fluid 6 is formed within the said hollow body 2, and, since the cavity is coaxially occupied by the plug 3, this passage is essentially tubular in shape.

[0009] The hollow body 2 comprises an upper portion 2a of essentially cylindrical shape and a lower portion 2b which is tapered downwards, with an outward-facing convexity.

[0010] A plurality of fins 25, having the function of preventing torsional motions of the flow of filling fluid, extend from the inner surface of the hollow body 2.

[0011] The top of the hollow body 2 is closed by a plate 9, pierced centrally to provide a housing for a hollow cylinder 10.

[0012] The cylinder 10 houses in a coaxial way a duct 11 and comprises an upper portion 10a, which extends both above and below the plate 9, and a lower portion 10b. Normally, the said upper and lower portions 10a and 10b are made in two separate pieces. On the cylindrical surface of the lower portion 10b of the cylinder 10 there is a plurality of apertures 12 which allow the duct 11 to communicate with the outside of the hollow cylinder 10.

[0013] The outer end of the upper portion 10a of the cylinder 10 is connected to an L-shaped connector 13 which in turn is connected by a suitable line (not shown) to a source of compressed air.

[0014] The outer surface of the upper portion 10a of the cylinder 10 has a downward facing shoulder 18 in the part lying below the plate 9.

[0015] The plug 3 comprises a stopper element 14 designed to interact with the edge of the outlet aperture 5 of the hollow body 2. The stopper element 14 is ogival in section and is connected to a stem 15 by a stepped portion, forming a set of three shoulders 16a, 16b and 16c of decreasing diameter.

[0016] The stem 15 has a diameter essentially equal to the diameter of the duct 11 and is inserted slidably into the duct, in the lower portion 10b of the cylinder 10. Thus the lower portion 10b of the cylinder 10 also acts as a guide means for the plug 3, to ensure that it remains coaxial as required during the whole operating phase of the valve unit.

[0017] Return means 17, in the form of a spring in this example, are placed between the lower edge of the cylinder 10 and the shoulder 16c of smallest diameter of the plug 3.

[0018] The valve unit according to the invention comprises means of actuating the plug 3. These actuator means comprise a deformable tubular cylinder 19, made from an elastic material such as a rubber tube. The tubular cylinder 19 is positioned in the hollow body 2, outside the stem 15 of the plug 3 and outside the hollow cylinder 10, and is retained at its upper end by bear-

ing against the shoulder 18 of the upper portion 10a of the cylinder 10, and at its lower end by bearing against the intermediate shoulder 16b of the plug 3.

[0019] More specifically, the deformable tubular cylinder 19 extends between the lower surface of the plate 9 and the lower shoulder 16a, of greatest diameter, of the plug 3, bearing on the corresponding surfaces. The tubular cylinder 19 also has flanges 20a, 20b projecting inwards. The upper flange 20a has a shoulder facing upwards, designed to engage with the said shoulder 18 of the upper portion 10a of the cylinder 10. The lower flange 20b, on the other hand, has a shoulder facing downwards, designed to engage with the intermediate shoulder 16b of the plug 3.

[0020] Outside the tubular cylinder 19 there is placed a membrane 21, which is fixed at its top to the plate 9 and at its bottom to the plug 3, and which is retained between the lower shoulder 16a of the plug and the lower edge of the tubular cylinder 19. The function of this membrane 21 is to isolate the passage 8 for the filling fluid from the other parts of the valve unit, in order to prevent the possibility of external contamination (which might be caused, for example, by the compressed air injected through the apertures 12).

[0021] The valve unit according to the invention comprises means of directing a secondary fluid towards and/or from the container 7. In practice, an annular channel 22 is formed in the body of the plate 9, this channel extending in a plane essentially orthogonal to the longitudinal axis of the valve unit, in a position near the perimeter of the plate 9. For this purpose, the plate 9 is formed from two half-plates 9a, 9b which are mated together. Half-channels are formed on the surfaces of the corresponding half-plates 9a, 9b designed to be mated together, these half-channels forming the annular channel 22 when the plate 9 is assembled. This annular channel 22 is connected by means of an L-shaped sleeve 23 to an external source of sterile inert gas (not shown) or, in a way which can be selected as desired, to the said source of sterile inert gas and to suction means (not shown).

[0022] A plurality of longitudinal channels 24 originate from the annular channel 22, these channels being formed in the lower half-plate 9b and continuing in the thickness of the walls of the hollow body 2. These longitudinal channels 24 open outwards at the lower edge of the portion 2b of the hollow body 2 in a plurality of corresponding apertures 26, which form a ring surrounding the outlet aperture 5 of the valve unit.

[0023] The two half-plates 9a, 9b and the hollow body 2 are held together by known fixing means, consisting of a screw and nut system 27 in the example.

[0024] The operation of the valve unit according to the invention will now be described, again with reference to the figures.

[0025] The valve unit 1 is opened by raising the plug 3. This operation requires the injection of compressed air into the hollow cylinder 10 and then, through the ap-

ertures 12, into the space between the plug 3 and the tubular cylinder 19. The compressed air causes the tubular cylinder 19 to swell and therefore to contract in the axial direction. Since the tubular cylinder 19 is fixed to the plug 3, the latter is raised by a sufficient amount to permit the supply of the filling fluid, as shown in Figure 2.

[0026] Throughout the supply phase at least, the secondary fluid directing means described above operate in the blowing mode, by injecting through the L-shaped sleeve 23 a sterile inert gas which, after flowing through the annular channel 22 and being distributed from there into the longitudinal channels 24, emerges from the apertures 26, thus creating a tubular flow of sterile gas around the flow of supplied filling fluid. Thus the fluid 6 is isolated from the external environment by means of the aseptic barrier created by the sterile gas, enabling the filling phase to be carried out in conditions of optimal hygiene.

[0027] At the end of the supply, the valve unit is closed, simply by interrupting the injection of compressed air through the sleeve 13. Thus the tubular cylinder 19 ceases to be contracted, and consequently, with the assistance of the return spring 17, it returns to its normal length, thus lowering the plug 3 until it blocks the outlet aperture 5 of the valve unit.

[0028] In particular applications, it is necessary to suck out the foam formed on the surface of the supplied liquid, which would impede the completion of the filling of the container. In such a case, it is possible to select the suction mode, instead of the blowing mode, for the said secondary fluid directing means. The foam is thus sucked out by the apertures 26 and passes through the longitudinal channels 24, thus freeing the surface of the liquid.

[0029] The valve unit according to the invention also makes it possible to carry out a sterilizing cycle, using a flow of a suitable sterilizing fluid. This can be done simply by inserting the valve unit into a suitable container, injecting the sterilizing fluid through the inlet aperture 4, and selecting the suction mode for the secondary fluid directing means. In this way a flow of sterilizing fluid is created through the valve unit, enabling the unit to be cleaned thoroughly.

[0030] The advantages of the valve unit according to the invention as compared with the known art are clear from the above description.

[0031] In the first place, the arrangement of the secondary fluid directing means, in other words the longitudinal channels 24 and the corresponding apertures 26, in a ring around the filling fluid outlet aperture 5 makes it possible to create a jacket of sterile gas, flowing in co-current parallel to and around the flow of supplied fluid. This arrangement provides the greatest degree of sterility in the filling stage.

[0032] Furthermore, since these secondary fluid directing means are connecting for operation on command to the said suction means or to a source of sterile inert gas, the device according to the invention provides

a remarkable versatility of application, as fully described above.

[0033] The valve unit according to the invention is also compact and of simple construction.

[0034] Clearly, only one particular embodiment of the valve unit to which the present invention relates has been described, and a person skilled in the art will be able to make any necessary modifications for the adaptation of the invention to particular applications, without departure from the scope of protection of the present invention.

[0035] For example, the actuator means of the plug 3 can alternatively be chosen from those generally used in filling valves of this type.

[0036] The fins 25 can be formed directly on the membrane 21 instead of on the inner walls of the hollow body 2.

[0037] The membrane 21, although particularly advantageous for the purpose of ensuring the sterility of the operation, could also be omitted.

Claims

1. Valve unit (1), particularly for machines for filling containers (7), comprising a hollow body (2) in which a plug (3) is slidably housed, a passage (8) for a fluid (6) for filling the said container (7) being formed in the said hollow body (2), **characterized in that** the said valve unit comprises means of directing a secondary fluid towards and/or from the container (7), these means being separated from the said passage (8) for the filling fluid (6).
2. Valve unit according to Claim 1, in which the said secondary fluid directing means are connected to a source of sterile inert gas.
3. Valve unit according to Claim 1 or 2, in which the said secondary fluid directing means are connectable, on command, to the said source of a sterile inert gas or to suction means.
4. Valve unit according to any one of Claims 1 to 3, in which the said secondary fluid directing means comprise a plurality of longitudinal channels (24) opening to the outside in a plurality of corresponding apertures (26), which form a ring surrounding the outlet aperture (5) of the valve unit.
5. Valve unit according to Claim 4, in which the said plurality of longitudinal channels (24) are connected to an annular channel (22) which acts as a manifold and which is in fluid communication with the said source of sterile inert gas or with the said suction means.
6. Valve unit according to Claim 4 or 5, the said valve unit comprising a plate (9) positioned to cover the top of the said hollow body (2) and consisting of an upper half-plate (9a) and a lower half-plate (9b), in which the said annular channel (22) comprises two half-channels, one formed in the said upper half-plate (9a) and one in the lower half-plate (9b), which when joined together form the annular channel (22), and in which the said longitudinal channels (24) are formed in the lower half-plate (9b) and continue in the thickness of the walls of the hollow body (2).
7. Valve unit according to any one of Claims 1 to 6, in which a plurality of fins (25), acting as flow stabilizers, extend from the inner surface of the hollow body (2).
8. Valve unit according to any one of Claims 1 to 7, in which the said hollow body (2) houses coaxially a hollow cylinder (10) in which a duct (11) is formed, the stem (15) of the said plug (3) being slidably inserted into the said duct (11).
9. Valve unit according to Claim 8, in which the said duct (11) is in flow communication with a source of compressed air, a plurality of apertures (12) being formed on the cylindrical surface of the lower portion (10b) of the cylinder (10), and in which a deformable tubular cylinder (19) is placed outside the stem (15) of the plug (3) and outside the hollow cylinder (10), this tubular cylinder being fixed at the top to the said plate (9) and/or to the said hollow cylinder (10) and at the bottom to the said plug (3), in such a way that, when the compressed air is injected through the duct (11) and the apertures (12), the said tubular cylinder (19) swells, causing it to shorten and to raise the said plug (3).
10. Valve unit according to any one of Claims 1 to 9, in which a membrane (21), for isolating the said passage (8) for the filling fluid (6), is fixed at its top to the plate (9) and at its bottom to the plug (3).
11. Method for filling a container (7) comprising the step of making a sterile inert gas flow parallel to and in co-current with the supplied filling fluid (6), this gas forming a tubular jacket of gas around the jet of the said filling fluid (6).
12. Method according to Claim 11, comprising the step of providing a valve unit according to any one of Claims 1 to 10.

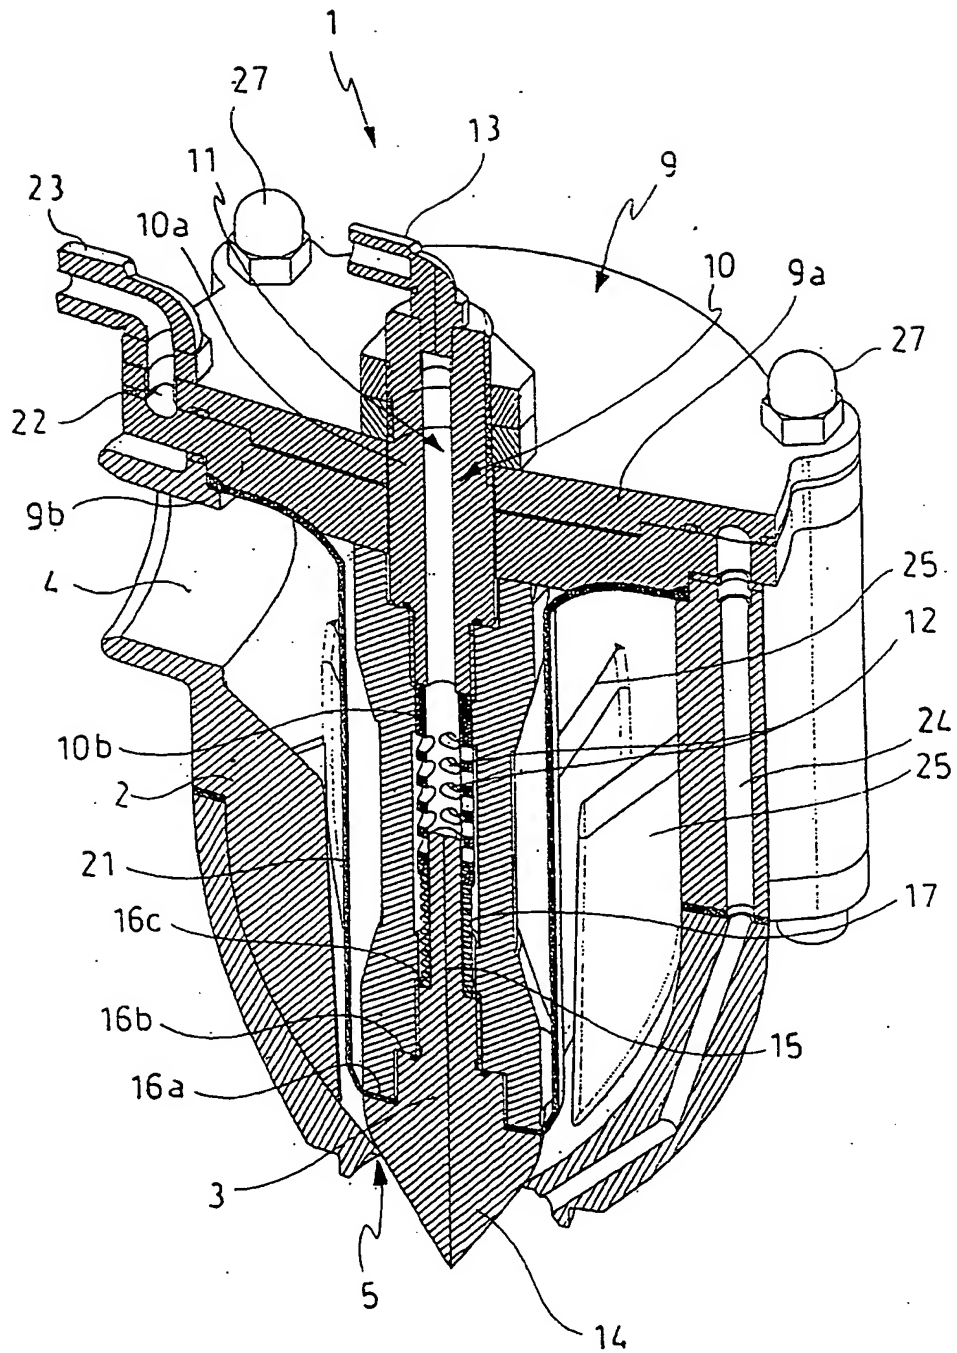


FIG. 1

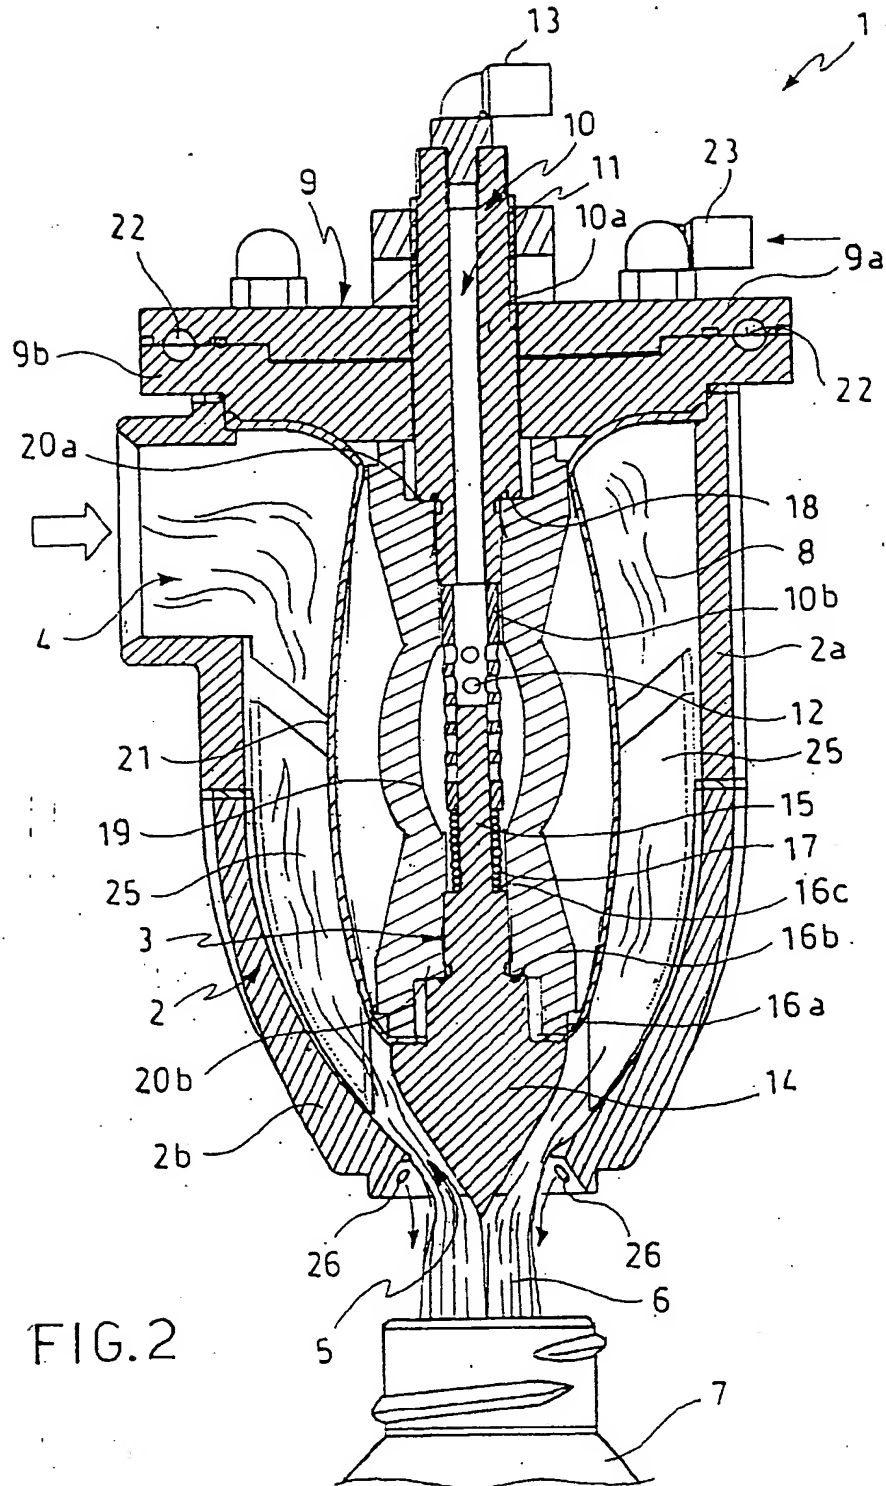


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 83 0805

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Incl.7)
X	US 6 192 947 B1 (ALLEGRO PIERLUIGI ET AL) 27 February 2001 (2001-02-27) * column 2, line 44 * * column 3, line 11 - line 19 * * figure 2 *	1-3	B67C3/26 B67C3/22 B67C3/10
X	EP 0 521 475 A (SEITZ ENZINGER NOLL MASCH) 7 January 1993 (1993-01-07) * column 8, line 20 - line 26; figures 1,2 *	1	
A		4	
X	DE 42 19 082 A (KRONSEDER MASCHF KRONES) 16 December 1993 (1993-12-16) * abstract; figure 2 *	1	
X	US 4 436 124 A (BORSTELMANN WOLFGANG) 13 March 1984 (1984-03-13) * column 1, line 66 - column 2, line 9 * * column 2, line 52 - line 58 * * figures 1,2,4 *	11	
X	US 3 498 508 A (FRANCISOU JACQUES ET AL) 3 March 1970 (1970-03-03) * column 2, line 35 - line 41; figure 1 *	1-3	
A	GB 1 066 575 A (JAGENBERG WERKE AG) 26 April 1967 (1967-04-26) * page 2, line 36 - line 39; figures *	1,11	
A	DE 596 429 C (RADBRUCH H C) 19 April 1934 (1934-04-19) * figures 1,2 *	1,4	
A	US 6 230 472 B1 (STAHLCKER WERNER) 15 May 2001 (2001-05-15) * column 4, line 24 - line 25 *	1,11	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 May 2002	Examiner Martínez Navarro, A.
CATEGORY OF CITED DOCUMENTS		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons A: technological background O: non-written disclosure P: intermediate document & : member of the same patent family, corresponding document	
X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document			

EPO FORM 1503 03 82 (P04001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 83 0805

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
A	US 5 031 673 A (CLUESSERATH LUDWIG) 16 July 1991 (1991-07-16) * column 4, line 8 - line 9 *	1,11	
A	GB 2 280 669 A (SHEPPARD RAYMOND WILLIAM) 8 February 1995 (1995-02-08) * page 2, paragraph 3 *	1,11	
A	DE 40 36 290 A (KRONSEDER MASCHF KRONES) 12 December 1991 (1991-12-12) * column 2, line 27 - line 29 *	1,11	
			TECHNICAL FIELDS SEARCHED (IntCl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 May 2002	Examiner Martínez Navarro, A.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document	

EPO FORM 1503 (03/12) (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 83 0805

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-05-2002

Parent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6192947	B1	27-02-2001	IT VR970056 A1	21-12-1998
			AT 211116 T	15-01-2002
			DE 69803040 D1	31-01-2002
			DE 962420 T1	20-12-2001
			EP 0885838 A1	23-12-1998
			EP 0960852 A2	01-12-1999
			EP 0962420 A2	08-12-1999
			US 6079460 A	27-06-2000
EP 0521475	A	07-01-1993	DE 4122267 A1	07-01-1993
			AT 111424 T	15-09-1994
			DE 59200495 D1	20-10-1994
			EP 0521475 A2	07-01-1993
			ES 2060439 T3	16-11-1994
DE 4219082	A	16-12-1993	DE 4219082 A1	16-12-1993
US 4436124	A	13-03-1984	DE 3102678 A1	02-09-1982
			NL 8105734 A	16-08-1982
US 3498508	A	03-03-1970	FR 1482108 A	26-05-1967
			BE 696540 A	03-10-1967
			CH 465129 A	15-11-1968
			DE 1586245 A1	18-06-1970
			GB 1127713 A	18-09-1968
			NL 6704331 A	05-10-1967
GB 1066575	A	26-04-1967	DE 1186768 B	04-02-1965
			BE 651610 A	01-12-1964
			CH 425509 A	30-11-1966
			NL 6409034 A	15-02-1965
DE 596429	C	04-05-1934	NONE	
US 6230472	B1	15-05-2001	DE 19806520 A1	19-08-1999
			JP 11278445 A	12-10-1999
US 5031673	A	16-07-1991	DE 3809852 A1	05-10-1989
			AT 69437 T	15-11-1991
			DE 58900444 D1	19-12-1991
			EP 0334288 A1	27-09-1989
			ES 2028397 T3	01-07-1992
			GR 3003788 T3	16-03-1993
			US 5163487 A	17-11-1992
GB 2280669	A	08-02-1995	NONE	

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 83 0805

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-05-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4036290 A	12-12-1991	DE 4036290 A1	12-12-1991
		AT 118752 T	15-03-1995
		BR 9106513 A	25-05-1993
		CA 2084784 A1	07-12-1991
		DE 59104718 D1	30-03-1995
		WO 9118823 A1	12-12-1991
		EP 0531358 A1	17-03-1993
		ES 2068584 T3	16-04-1995
		JP 2554221 B2	13-11-1996
		US 5558135 A	24-09-1996

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82